


## ONE LEG STEEL WIRE ROPE SLINGS

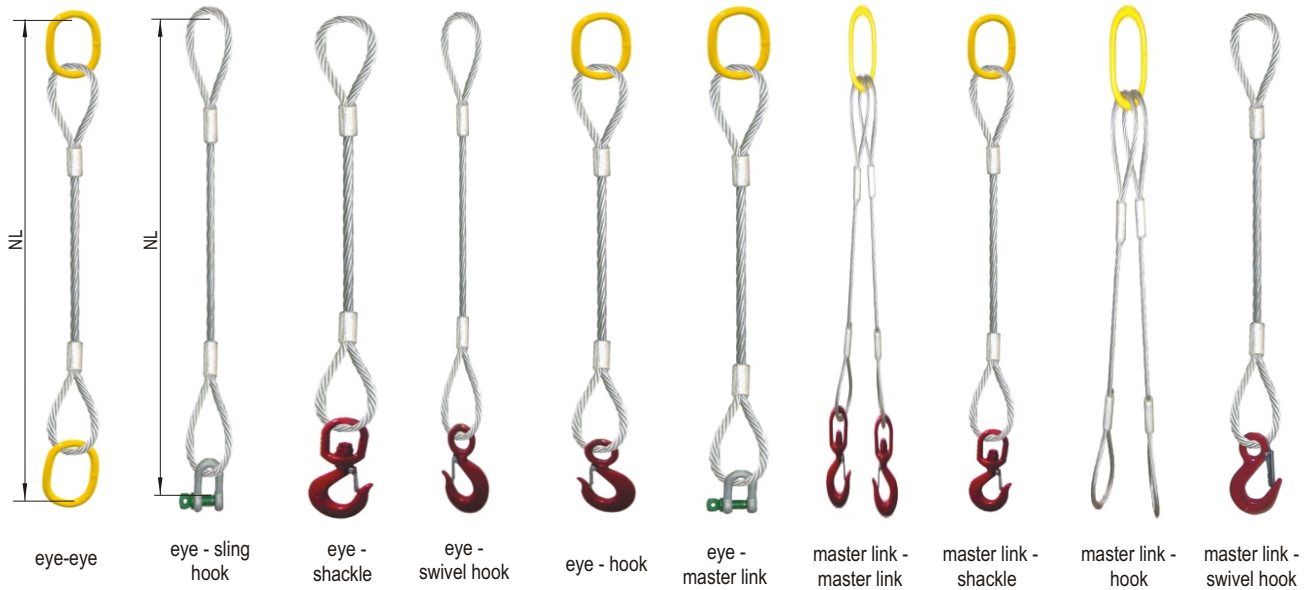

| Rope diameter mm | 4    | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   | 18   | 20   | 22   | 24   | 26   |
|------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| W.L.L. tons      | 0.20 | 0.25 | 0.4  | 0.55 | 0.7  | 0.85 | 1.05 | 1.30 | 1.55 | 1.80 | 2.12 | 2.70 | 3.40 | 4.35 | 5.20 | 6.30 | 7.20 |
| Rope diameter mm | 28   | 32   | 36   | 40   | 44   | 48   | 52   | 56   | 60   | 64   | 68   | 72   | 76   |      |      |      |      |
| W.L.L. tons      | 8.40 | 11.0 | 14.0 | 17.0 | 21.0 | 25.0 | 29.0 | 33.5 | 39.0 | 47.0 | 54.0 | 62.0 | 70.0 |      |      |      |      |


NL - working length

## TWO LEG STEEL WIRE ROPE SLINGS




| Rope diameter mm                                      | 4    | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   | 18   | 20   | 22   | 24   | 26   |
|-------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| W.L.L. tons, $\alpha = 0^\circ \text{ до } 45^\circ$  | 0.28 | 0.35 | 0.56 | 0.77 | 0.95 | 1.20 | 1.50 | 1.80 | 2.12 | 2.50 | 3.00 | 3.85 | 4.80 | 6.00 | 7.20 | 8.80 | 10.0 |
| W.L.L. tons, $\alpha = 45^\circ \text{ до } 60^\circ$ | 0.2  | 0.25 | 0.4  | 0.55 | 0.7  | 0.85 | 1.05 | 1.30 | 1.55 | 1.80 | 2.12 | 2.70 | 3.40 | 4.35 | 5.20 | 6.30 | 7.20 |
| Rope diameter mm                                      | 28   | 32   | 36   | 40   | 44   | 48   | 52   | 56   | 60   |      |      |      |      |      |      |      |      |
| W.L.L. tons, $\alpha = 0^\circ \text{ до } 45^\circ$  | 11.8 | 15.0 | 19.0 | 23.5 | 29.0 | 35.0 | 40.0 | 47.0 | 54.0 |      |      |      |      |      |      |      |      |
| W.L.L. tons, $\alpha = 45^\circ \text{ до } 60^\circ$ | 8.40 | 11.0 | 14.0 | 17.0 | 21.0 | 25.0 | 29.0 | 33.5 | 39.0 |      |      |      |      |      |      |      |      |

## THREE LEG STEEL WIRE ROPE SLINGS

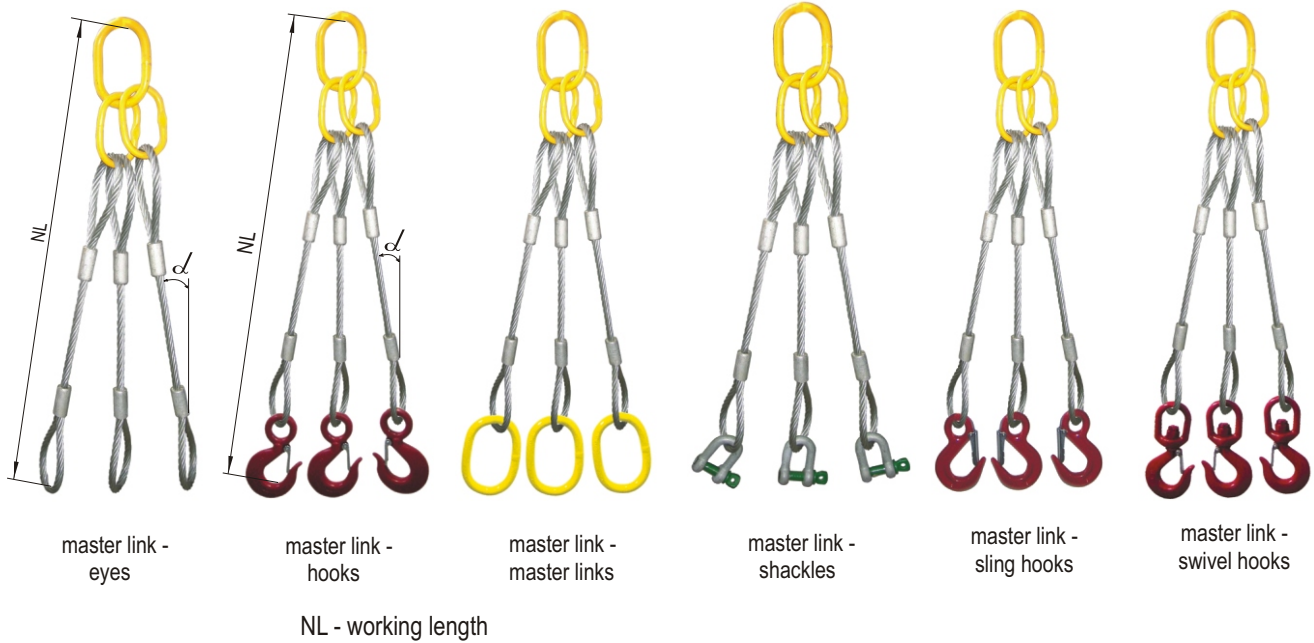

## FOUR LEG STEEL WIRE ROPE SLINGS

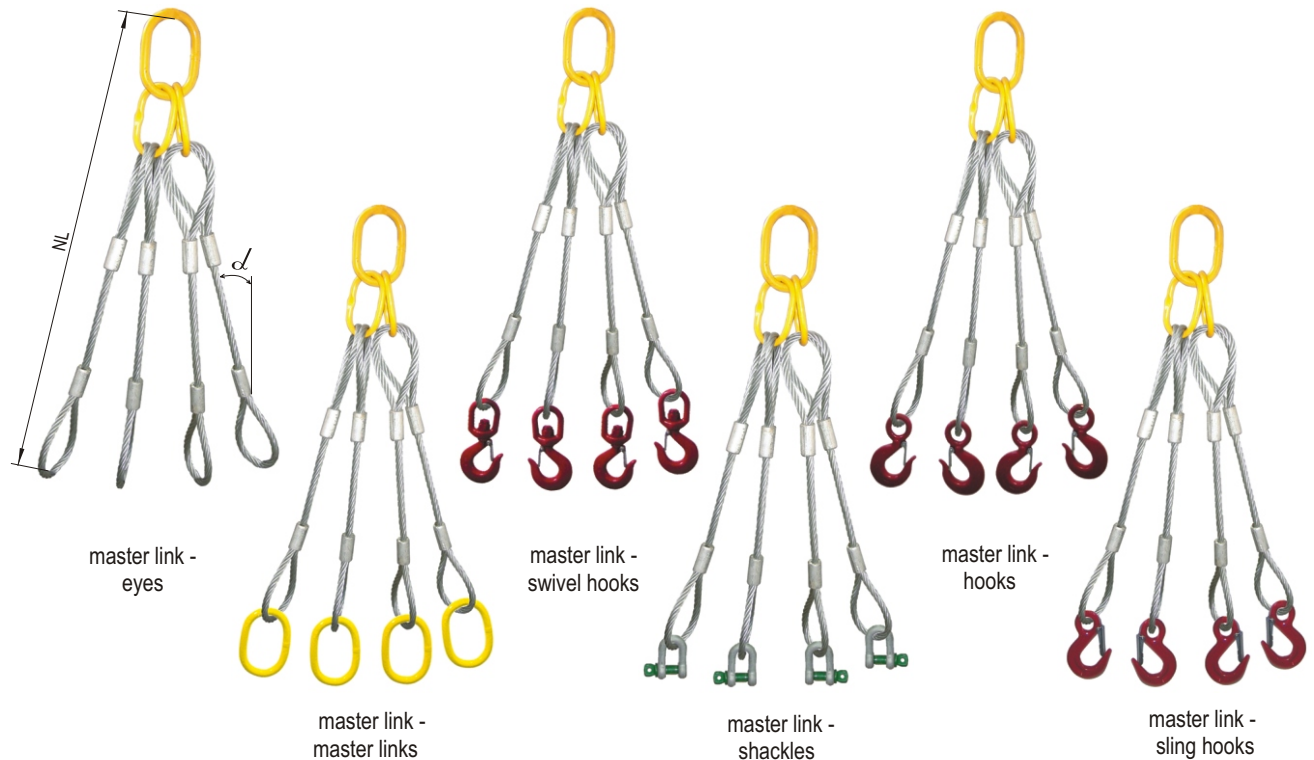

| Rope diameter<br>mm                                     | 4    | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   | 18   | 20   | 22   | 24   | 26   |
|---------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| W.L.L.<br>Tons $\alpha = 0^\circ \text{ до } 45^\circ$  | 0.42 | 0.53 | 0.84 | 1.16 | 1.50 | 1.80 | 2.25 | 2.70 | 3.30 | 3.85 | 4.35 | 5.65 | 7.20 | 9.00 | 11.0 | 13.5 | 15.0 |
| W.L.L.<br>tons $\alpha = 45^\circ \text{ до } 60^\circ$ | 0.30 | 0.38 | 0.60 | 0.83 | 1.05 | 1.30 | 1.60 | 1.95 | 2.30 | 2.70 | 3.15 | 4.20 | 5.20 | 6.50 | 7.80 | 9.80 | 11.0 |
| Rope diameter<br>mm                                     | 28   | 32   | 36   | 40   | 44   | 48   | 52   | 56   | 60   |      |      |      |      |      |      |      |      |
| W.L.L.<br>Tons $\alpha = 0^\circ \text{ до } 45^\circ$  | 18.0 | 23.5 | 29.0 | 36.0 | 44.0 | 52.0 | 62.0 | 71.0 | 81.0 |      |      |      |      |      |      |      |      |
| W.L.L.<br>Tons $\alpha = 45^\circ \text{ до } 60^\circ$ | 12.5 | 16.5 | 21.0 | 26.0 | 31.5 | 37.0 | 44.0 | 50.0 | 58.0 |      |      |      |      |      |      |      |      |

NL - working length