


## ROUND LINK CHAIN ACC. TO DIN 766

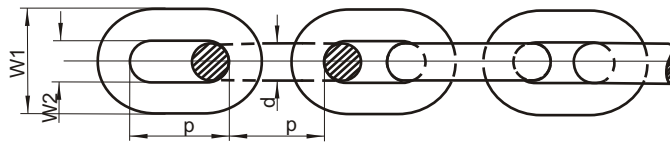

Size	Pitch	Width		W.L.L.		Weight per meter
		Inside	Outside	Working load	Proof load	
d mm	p mm	W1 mm	W2 mm	kg	kg	kg
4	16.0	4.8	14	200	500	0.32
5	18.5	6.0	17	320	800	0.50
6	18.5	7.2	20	400	1000	0.80
7	22.0	8.4	23	630	1600	1.10
8	24.0	9.6	26	800	2000	1.40
9	27.0	10.8	30	1000	2500	1.80
10	28.0	12.0	36	1250	3200	2.30
11	31.0	13.2	40	1600	4000	2.70
13	36.0	15.6	47	2000	5000	3.90
14	41.0	16.8	50	2500	6300	4.40
16	45.0	19.2	58	3200	8000	5.80
18	50.0	21.6	65	4000	10000	7.40
20	56.0	24.0	72	5000	12500	9.00
23	64.0	27.6	83	6300	16000	12.00
26	73.0	31.2	94	8000	20000	15.00
28	78.0	33.6	101	10000	25000	18.00
30	84.0	36.0	108	11200	28000	20.00
32	90.0	38.4	115	12500	32000	23.00